


DCM

LOUDSPEAKERS

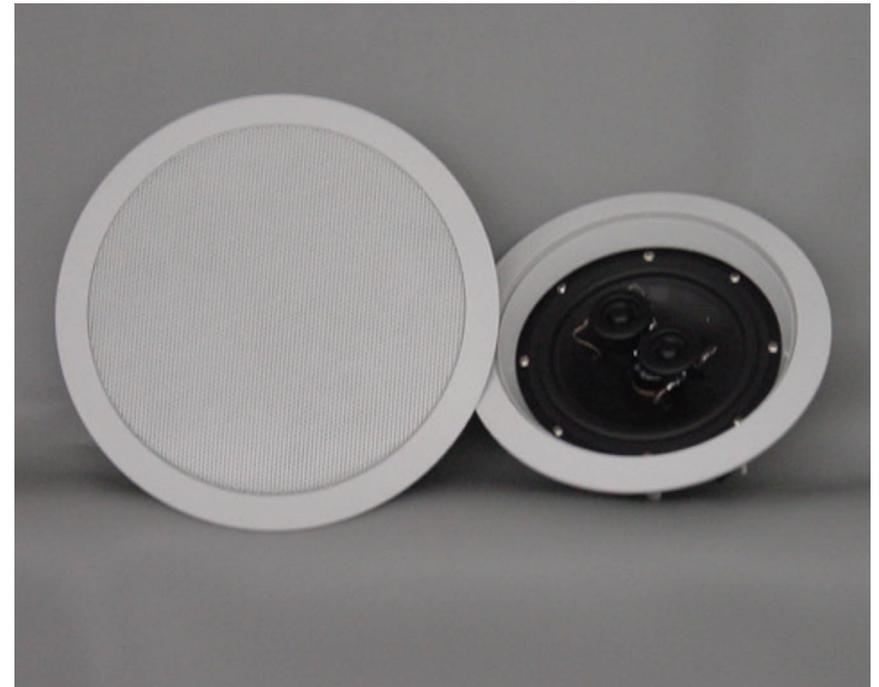

DCM
LOUDSPEAKERS
1 Mitek Plaza
Winslow, IL 61089
Phone (877)DCM-LOUD

Visit our Internet web site at: www.dcmspeakers.com

DCM is a registered trademark of Mitek Corporation.

Due to our policy of continuous improvement, specifications are subject to change without notice.

21A6506

C622 OWNER'S MANUAL

CONGRATULATIONS

We appreciate your choice of DCM In-Ceiling Speakers. Properly installed and operated, DCM In-Ceiling Speakers should provide years of worry-free listening pleasure. It's important that you follow each step in this guide carefully to insure proper installation.

SPECIFICATIONS	C622
Frequency Response	64Hz-20kHz ±3dB
Impedance	8 ohms nominal
Power Handling	35 Watts RMS 70 Watts Peak Music
Sensitivity (1W/1m)	84dB
Woofers Diameter	6-1/2"
Tweeter	(2) 1/2" Balanced Dome
Mounting Depth	3-5/16"
Baffle Diameter	9"

PAINTING YOUR DCM IN-CEILING SPEAKERS

DCM In-Ceiling Speakers are designed to accept all types of interior and exterior paints. Spray or roller application should provide excellent results. A paint shield is included with all DCM In-Ceiling Speakers to protect the speakers during the painting process.

DCM WARRANTY INFORMATION

All DCM In-Ceiling Speakers purchased in the United States from an authorized DCM dealer are guaranteed against defects in material and workmanship for a period ten years from the date purchased by the end user, and limited to the original retail purchaser of the product.

DCM disclaims any liability for other incurred damages resulting from product defects. Any expenses incurred in the removal and reinstallation of product is not covered by this warranty. DCM's total liability will not exceed the purchase price of the product. This warranty is valid in the United States only.

Proof of purchase is required when requesting service, so please retain your sales receipt and take a moment to register your warranty on line at www.dcm.com.

OTHER PRODUCTS FROM DCM

In-Wall Loudspeakers

W625

6-1/2" Two-Way In-Wall Speaker
25mm Soft Dome Tweeter
Impedance: 8 ohms nominal
Sensitivity: 85dB
55W RMS/110W Peak Music
Frequency Response: 55Hz-20kHz
12 1/16"H x 8 9/16"W x 2 7/8"D

W825

8" Two-Way In-Wall Speaker
25mm Soft Dome Tweeter
Impedance: 8 ohms nominal
Sensitivity: 86dB
60W RMS/120W Peak Music
Frequency Response: 36Hz-20kHz
14 1/16"H x 10 1/16"W x 3 1/2"D

Home Loudspeakers

FT6

6-1/2" Two-Way Home Loudspeaker
19mm Dome Tweeter
Impedance: 8 ohms nominal
Sensitivity: 89dB
100W RMS/200W Peak Music
Frequency Response: 55Hz-20kHz
12 3/4"H x 7 1/2"W x 8 1/2"D

FT10

10" Three-Way Home Loudspeaker
19mm Dome Tweeter
Impedance: 8 ohms nominal
Sensitivity: 92dB
200W RMS/400W Peak Music
Frequency Response: 30Hz-20kHz
31 7/16"H x 11 1/8"W x 14 5/16"D

FT6C

6-1/2" Center Channel Loudspeaker
19mm Dome Tweeter
Impedance: 8 ohms nominal
Sensitivity: 92dB
100W RMS/150W Peak Music
Frequency Response: 60Hz-20kHz
7 1/2"H x 17 5/8"W x 8"D

FT12

12" Three-Way Home Loudspeaker
19mm Dome Tweeter
Impedance: 8 ohms nominal
Sensitivity: 94dB
250W RMS/500W Peak Music
Frequency Response: 25Hz-20kHz
35"H x 13 1/8"W x 16 1/16"D

TECHNICAL ASSISTANCE


For additional technical assistance you can visit our web site at www.dcmspeakers.com. Otherwise, our technical service representatives can be reached by phone: 1-877-DCM-LOUD or by email: technical@dcmspeakers.com.

FEATURES

The C622 In-Ceiling Speakers are designed for use in small rooms or anywhere that both channels of a stereo signal need to be reproduced while taking up a minimum amount of space.


It utilizes a unique dual voice coil woofer design that allows both channels of a stereo system to drive one cone. This feature coupled with a dual tweeter system allow this unit to operate as two speakers in one.

This unit is of a water resistant design and therefore can be used in high humidity areas such as a bathroom or laundry room.

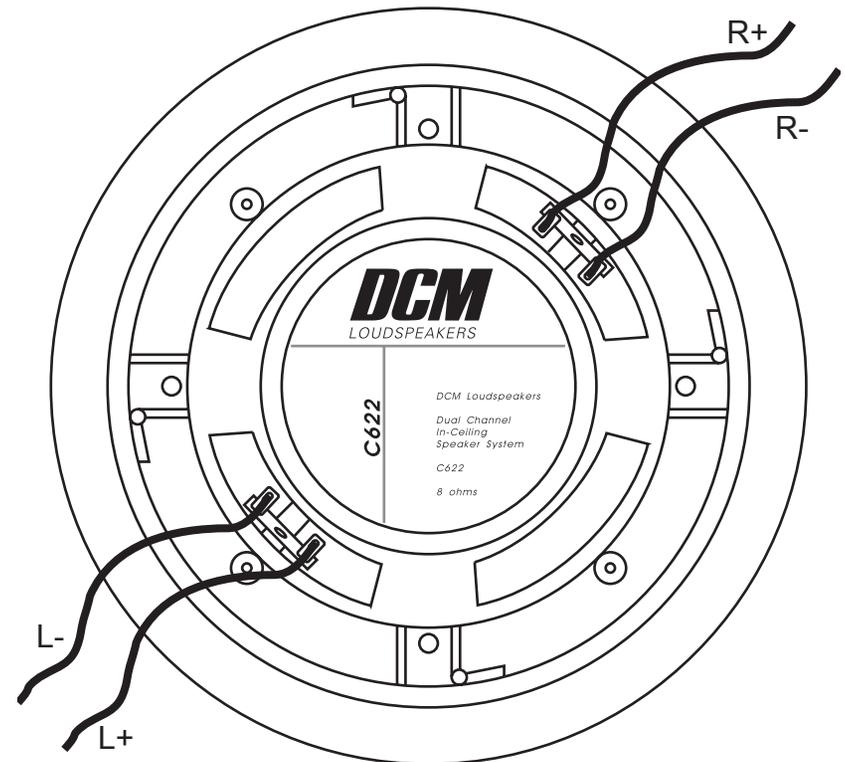


STEP 1

Using a stud finder (available at low cost at most hardware stores) or other accurate method, locate center point between two joists and mark. Using template provided, trace hole pattern on surface of ceiling

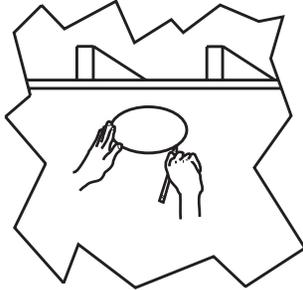


STEP 2

Using a sabre saw, keyhole saw or very sharp utility knife, cut hole in wall, following traced pattern.

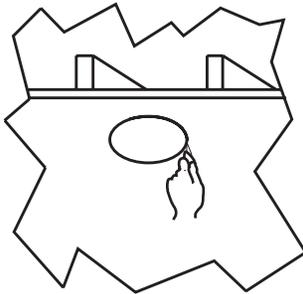


STEP 3

Run loudspeaker wires to sound source location. There are several methods you can use to accomplish wiring, depending on the construction characteristics of the room or house. You can add a professional touch to your installation by using a speaker terminal plate at the source location. Leave sufficient amount of wire at speaker location (8 to 10 inches) to complete connection.

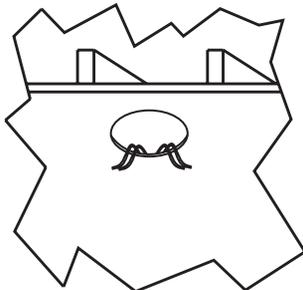


STEP 4

Attach loudspeaker wires to speaker terminals, observing correct polarity, and position speaker frame up into cutout. Be careful not to pinch wires in the process.

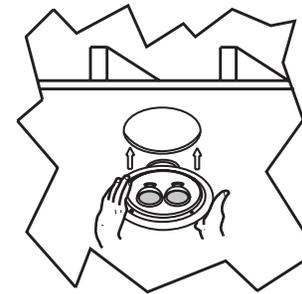

STEP 5

Carefully tighten the four mounting screws. This will cause the mounting wings to rotate out behind the mounting surface and secure the speaker in place.

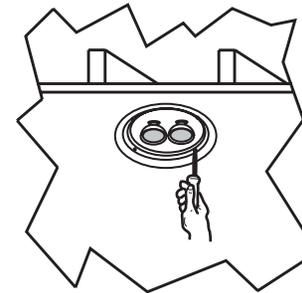

STEP 6

After the speaker panel is secured tightly, test for sound. When you are satisfied the speaker is operational, affix grill. As grill is designed for a snug fit, you'll need to position one edge into slot first, and press or squeeze around perimeter of grill, while pushing leading edges into grill slot.

